



## SOFT JAWS FOR HYDRAULIC CHUCKS

TAIKI raises the concept of “quality creates goodwill, goodwill solidifies quality”, providing versatile workholding solutions to our customers and optimizing their processing efficiency.

We uphold product quality, professional service, and customer satisfaction to advance together with our customers via our products.

Welcome OEM customers to be our business partners, please feel free to contact us for more details or information. (Please refer to pages 22-24)

### 1.5mm×60° STANDARD TYPE / EXTRA-HEIGHT TYPE

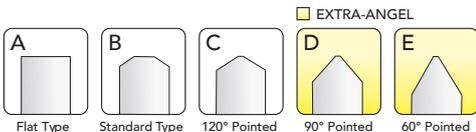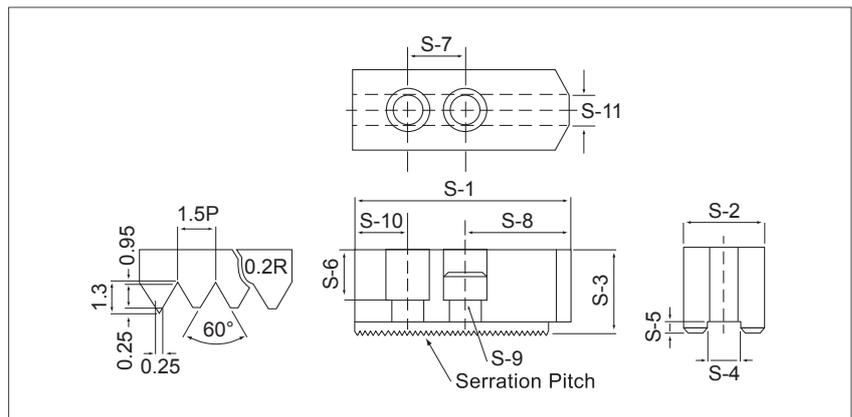

#### With left angle for different workpiece

■ For other specifications not mentioned in the below dimensions, refer to the customization form on page 22.

#### DIMENSIONS

UNIT:mm

##### SJ04 / Pointed Type

DIMENSION MODEL	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Serration Pitch	Angle	Gross Weight (kg)
SJ04023C			23			13							 120° Pointed	0.5
SJ04036C	51	23	36	10	4	26	14	27	M8	10	3	1.5×60°		0.8
SJ04048C			48			38								1

##### SJ05 / Pointed Type

DIMENSION MODEL	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Serration Pitch	Angle	Gross Weight (kg)
SJ05027C			27			17							 120° Pointed	0.6
SJ05036C			36			26						1.5×60°		0.9
SJ05048C	62	23	48	10	4	38	14	38	M8	10	3	1.1		
SJ05070C			70			60						1.5		
SJ05100C			100			90						2.5		

■ Material: S50C    ■ To conform to chucks from Kitagawa and other global brands.