
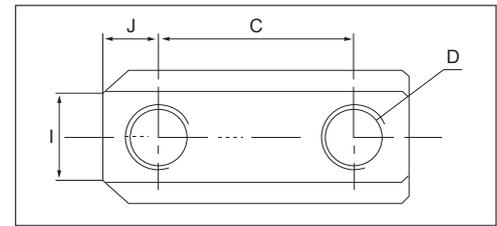


JAW T-NUTS

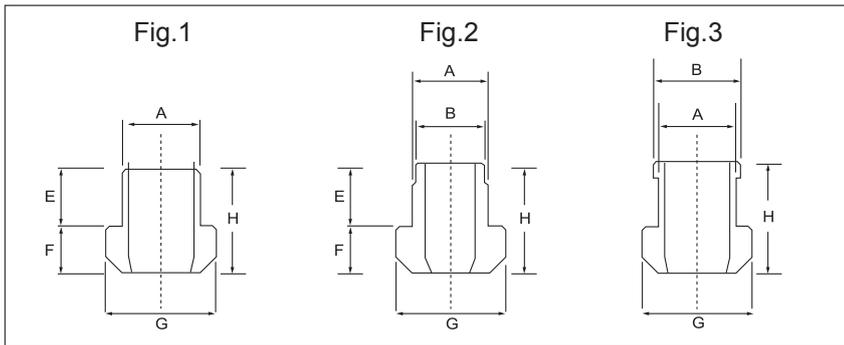

To conform to power chucks.
 ■ Varied sizes of t-nuts are also available.
 ■ Jaw Nuts could be designed according to the brand of power chucks.

FEATURE

- To connect power chuck and soft jaws, to conform to different brands.
- We categorize the T-Nuts into
 - Standard type (fig.1)
 - Special type (fig.2)
 - 6" Soft Jaws are used for 8" chuck, 8" Soft Jaws are used for 10" chuck
 - 10" Soft Jaws are used for 12" chuck, 12" Soft Jaws are used for 15" chuck
 - Special type (fig.3)
 - 10" Soft Jaws are used for 8" chuck

DIMENSIONS

UNIT:mm

■ Fig.1



Standard T-Nuts		To suit Kitagawa B-type											
DIMENSION	Chuck Size	A	C	D	E	F	G	H	I	J	To suit Kitagawa	Reference Drawing	Gross Weight (kg)
MODEL													
TB06	6"	12	20	M10	15	7.5	17.5	22.5	8	8.5	B-06	Fig.1	0.18
TB08	8"	14	25	M12	16	9.5	20.5	25.5	7	11	B-08	Fig.1	0.32
TB10	10"	16	30	M12	16	9.5	22.5	25.5	8	11	B-10	Fig.1	0.46
TB12	12"	18	30	M14	20	13.5	26.5	33.5	13	12	B-12	Fig.1	0.95

■ Fig.2




Standard T-Nuts		To suit Kitagawa B-200 type												
DIMENSION	Chuck Size	A	B	C	D	E	F	G	H	I	J	To suit Kitagawa	Reference Drawing	Gross Weight (kg)
MODEL														
T05	5"	10	--	14	M8	9.5	5.5	14.5	15	5	6	B-205	Fig.1	0.12
T06	6"	12	--	20	M10	11	7.5	17.5	18.5	8	8.5	B-206	Fig.1	0.14
T08	8"	14	--	25	M12	12	8.5	20.5	20.5	7	11	B-208	Fig.1	0.26
T10	10"	16	--	30	M12	13	8.5	22.5	21.5	8	11	B-210	Fig.1	0.34
T12	12"	21	--	30	M16	16.25	11.5	29.5	27.8	13	12	B-212	Fig.1	0.8
T15	15"	24	22	43	M20	29	16.5	33.5	45.5	11	17	B-15	Fig.2	1.2

■ Fig.3



Special T-Nuts		To suit Kitagawa B-200 type. Such as:6" soft jaw suitable for 8"chuck(6" to 8")											
DIMENSION	Chuck Size	Suitable for	A	B	C	D	G	H	I	J	To suit Kitagawa	Reference Drawing	Gross Weight (kg)
MODEL													
TS08-06	6"	8" to 6"	12	14	25	M10	17.5	18.5	7	8	B-206	Fig.3	0.18
TS06-08	8"	6" to 8"	14	12	20	M10	20.5	20.5	8	8	B-208	Fig.2	0.32
TS10-08	8"	10" to 8"	14	16	30	M12	20.5	20.5	8	11	B-208	Fig.3	0.32
TS08-10	10"	8" to 10"	16	14	25	M12	22.5	21.5	10	11	B-210	Fig.2	0.46
TS10-12	12"	10" to 12"	21	16	30	M12	29.5	28	11	11	B-212	Fig.2	0.86
TS12-15	15"	12" to 15"	24	21	30	M16	33.5	42	13	15	B-15	Fig.2	1.5

■ Fig.4



Standard T-Nuts													
DIMENSION	Chuck Size	A	C	D	E	F	G	H	I	J	To suit Kitagawa	Reference Drawing	Gross Weight (kg)
MODEL													
TB15	15"	25.5	26	M20	20.25	19	35	39.25			N-15	Fig.4	1.6
T21	21"	25	27	M20	26	19	37.5	45			B-21	Fig.4	2.01

■ Material: SCM440